


Artikelgruppe 1450

Spanneisen gekröpft mit Stützgewinde

Z-Type Clamp with Support Hole


Referenz-Nr. Order No.	L	b1	Gewinde		a	a2	b2	b3	c	e1	e2	d	 (g)
			metric	Zollgewinde whitworth									
1450-06060	60	6.6	M6	1/4	10	20	20	10	8	20	20	M8	80
1450-08080	80	9	M8	5/16	12	24	25	12	9	25	25	M8	170
1450-10100	100	11	M10	3/8	15	30	30	15	12	32	32	M10	245
1450-12125	125	14.5	M12-M14	1/2	19	40	38	20	16	40	40	M12	600
1450-16125	125	18.5	M16-M18	5/8	24	50	48	25	20	49	40	M16	925
1450-16160	160				24	50	48	25	20	49	50	M16	1205
1450-20160	160	22.5	M20-M22	3/4	29	58	58	30	24	55	55	M20	1705
1450-20200	200				29	58	58	30	24	55	70	M20	2145
1450-24160	160				33	70	70	35	28	53	55		2110
1450-24200	200	26	M24	1	33	70	70	35	28	72	60	M24	3070
1450-24250	250				33	70	70	35	28	72	80		3710
1450-30250	250	33	M30	1 1/4	38	80	77	40	40	91	80	M24	4635
1450-30315	315				38	80	77	40	40	91	100	M24	7050



DIN 6316

1450

- Dieses Produkt bietet den Vorteil, von der Höhe und den Durchgängen der Schraube zu profitieren.
- Gehärtet
- Schwarz beschichtet

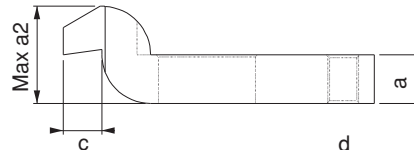

1450

- This product provides advantage to gain from the height and in the passings of the bolt
- Hardened
- Black Coating

